


开口型扭力扳手(单能型)

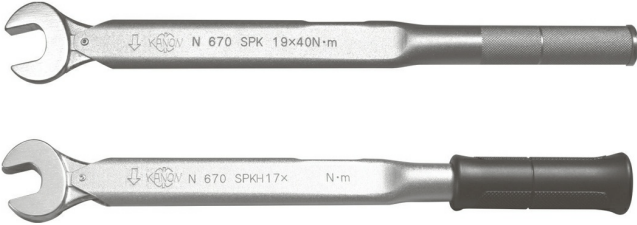

型号 | SPK

产地 | 日本·Kanon

产品描述

特点

多用于生产线上锁紧大量同样扭力的相同螺栓(螺母)无需刻度确认
更有效的应用于狭窄场合，例如机器的间隙
只能按箭头方向转动
设定扭力值需专用的扭力测试仪和调整工具，订货时需注明设定扭力值
精度：±3%以内

用途

用于拧紧螺丝，棘轮扳手头可提高效率，适合在生产线上大量锁定扭力且精度要求高的重复工作

规格参数

| 型号 | 扭力值 | 型号 | 扭力值 | 扭力扳手 | | | | | 全长 | 主要尺寸 (mm) | | | | |
|---------|----------|---------|--------|------------|----|----|----|----|-----|-------------|----|------|------|------|
| | | | | 开口尺寸 (W) | | | | | | 头部 | | 主体 | | |
| 公制 | Kgf · cm | 牛顿 | N · m | mm | | | | | mm | S | T | A | B | C |
| 30SPK | 5-30 | N3SPK | 0.5-3 | 5.5 | 6 | | | | 152 | 24 | 5 | 19.5 | 7.5 | 15 |
| | | | | 7 | 8 | 9 | 10 | | | | | | | |
| 80SPK | 15-80 | N8SPK | 1.5-8 | 5.5 | 6 | 7 | | | 175 | 24 | 5 | 19.5 | 7.5 | 15 |
| | | | | 8 | 9 | 10 | 11 | 12 | | | | | | |
| 190SPK | 35-190 | N19SPK | 3.5-19 | 10 | 11 | | | | 203 | 27 | 7 | 19.5 | 7.5 | 15 |
| | | | | 12 | 13 | 14 | | | 205 | 30 | 7 | | | |
| | | | | 17 | 19 | | | | 213 | 35 | 7 | | | |
| | | | | 10 | 11 | 12 | 13 | 14 | 248 | 35 | 8 | | | |
| 380SPK | 80-380 | N38SPK | 8-38 | 17 | 19 | | | | 252 | 39 | 8 | 26.6 | 8.2 | 20 |
| | | | | 21 | 22 | 23 | 24 | | 256 | 45 | 8 | | | |
| | | | | 26 | 27 | 28 | 29 | 32 | 264 | 52 | 9 | | | |
| | | | | 14 | 17 | 19 | 21 | | 319 | 40 | 10 | | | |
| 670SPK | 130-670 | N67SPK | 13-67 | 22 | 24 | 26 | | | 325 | 50 | 11 | 25.8 | 9.7 | 20 |
| | | | | 27 | 30 | 32 | | | 330 | 56 | 11 | | | |
| | | | | 36 | 41 | | | | 342 | 65 | 11 | | | |
| | | | | 17 | 19 | 22 | | | 390 | 52 | 12 | | | |
| 1200SPK | 240-1200 | N120SPK | 24-120 | 24 | 26 | 27 | | | 397 | 57 | 12 | 32.8 | 11.3 | 25 |
| | | | | 29 | 30 | 32 | | | 403 | 62 | 12 | | | |
| | | | | 36 | 41 | | | | 404 | 64 | 14 | | | |
| | | | | 19 | 22 | | | | 435 | 53 | 12 | | | |
| 1600SPK | 300-1600 | N160SPK | 30-160 | 24 | 26 | | | | 442 | 56 | 12 | 32.8 | 11.3 | 25 |
| | | | | 27 | 30 | 32 | 36 | | 449 | 64 | 14 | | | |
| | | | | 41 | | | | | 457 | 73 | 14 | | | |
| | | | | 19 | 22 | | | | 585 | 72 | 15 | | | |
| 2200SPK | 450-2200 | N220SPK | 45-220 | 24 | 27 | | | | 585 | 72 | 15 | 35.6 | 12.5 | 27.2 |
| | | | | 30 | 32 | 36 | | | 585 | 72 | 15 | | | |
| | | | | 41 | | | | | 597 | 82 | 15 | | | |
| | | | | 22 | 24 | | | | 650 | 67 | 16 | | | |
| 3100SPK | 650-3100 | N310SPK | 65-310 | 27 | 30 | 32 | | | 654 | 72 | 16 | 38.0 | 16 | 30 |
| | | | | 36 | 41 | | | | 662 | 82 | 16 | | | |
| | | | | 24 | 27 | | | | 833 | 74 | 18 | | | |
| | | | | 30 | 32 | | | | 838 | 78 | 18 | | | |
| 4200SPK | 900-4200 | N420SPK | 90-420 | 36 | | | | | 843 | 82 | 18 | 43.3 | 17.8 | 34 |
| | | | | 41 | | | | | 847 | 88 | 18 | | | |
| | | | | 46 | | | | | 760 | 94 | 18 | | | |