


30mm刃长的倒角刀

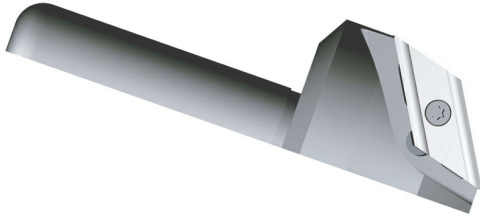

倒角加工

NICECUT

型号 | NK0574X

产地 | 日本·Fujigen

产品描述

用途 | 倒角加工

特点 | 拥有30mm长的刀刃与独创的断屑槽，解决了难切削材的加工问题
角度从5°~85°的17种可调种类的超强阵容

规格参数

型号	刃数	尺寸 (mm)										α°
		ϕD	ϕD_s	ϕd	ϕd_n	L	ls	ln	S	刃长X	刃长Z	
NK4554X- 1	1	54.9	12.0	32	-	135	80	55	21.4	21.1	21.1	45°
NK0574X	3	74.8	15.0	32	103.1	135	80	55	2.6	29.7	2.6	5°
NK1074X	3	74.5	15.0	32	99.5	135	80	55	5.2	28.9	5.1	10°
NK1571X	3	73.3	15.0	32	95.2	135	80	55	7.8	28.7	7.7	15°
NK2070X	3	71.8	15.0	32	90.3	135	80	55	10.3	28.1	10.2	20°
NK2568X	3	69.8	15.0	32	84.9	135	80	55	12.8	27.0	12.6	25°
NK3080X	3	67.4	15.0	32	79.0	135	80	55	15.1	25.8	14.9	30°
NK3563X	3	64.6	15.0	32	72.8	135	80	55	17.4	24.4	17.1	35°
NK4060X	3	61.4	15.0	32	66.3	135	80	55	19.5	22.9	19.2	40°
NK4557X	3	57.9	15.0	32	-	135	80	55	21.4	21.1	21.1	45°
NK5056X	3	57.0	18.0	32	-	135	80	55	23.2	19.2	22.9	50°
NK5556X	3	56.8	22.0	32	-	135	80	55	24.8	17.1	24.4	55°
NK6054X	3	54.3	24.0	32	-	135	80	55	26.3	14.9	25.8	60°
NK6553X	3	53.6	28.0	32	-	145	80	65	27.5	12.6	27.0	65°
NK7052X	3	52.8	32.0	32	-	145	80	65	28.5	10.2	28.1	70°
NK7550X	3	50.7	35.0	32	-	145	80	65	29.3	7.7	28.7	75°
NK8048X	3	48.5	38.0	32	-	145	80	65	29.9	5.1	28.9	80°
NK8048X	3	47.3	42.0	32	-	145	80	65	30.3	2.6	29.7	85°

规格参数

材质	进刀量 (fz)	切削速度 (m/min)	旋转数 (r.p.m.)	切削液	推荐刀片
普通钢	0.05-0.15	150-300	1200	NO	X63GUR AC15N
合金钢	0.05-0.15	150-300	1200	NO	
淬火钢HRC~45	0.05-0.15	150-300	1200	YES	-
淬火钢HRC45~65	-	-	-	-	
不锈钢	0.05-0.15	100-200	800	YES	X63GUR
铸铁	0.05-0.15	150-300	1200	NO	AC15N
树脂	0.08-0.12	700-800	4000	YES	X63GUR
铝合金	0.08-0.12	700-800	4000	YES	NK1010
钛合金镍合金	-	-	-	-	-

规格参数

图片	型号	材质类型	使用角数	标准包装
	X63GUR	NK1010	2	3pcs/盒
		NK2020		
		AC15N		